

SPX536 Main Features

GEOMETRICAL STABILITY CONTROL

- ✓ Outriggers multi-position and angle
- ✓ Automatic load of working area
- ✓ Different working area:
 - Red - 0%
 - Grey - pick&carry
 - Yellow - 50%
 - Green - 100%



P&C

PICK & CARRY

- ✓ Move your load on tracks, without stabilizers
- ✓ 500 kg P&C

VIRTUAL WALLS

- ✓ The operator can program safe working zones for the crane, setting perimeter boundaries beyond which the boom is prevented from reaching over



DIFFERENT ATTACHMENTS

- ✓ Three different JIBS
- ✓ Different tools completely integrated and radio remote controlled: glass manipulator, pipe manipulator, hydraulic fork...

SEARCHER HOOK



GLASS MANIPULATOR



HYDRAULIC JIB



CJEKKO
SPX536



Jekko srl
Via Campardone, 1 - 31014 Colle Umberto (TV) Italy
info@jekko.it - www.jekko-cranes.com

Product Catalog

SPX

SPX536

max 3600 kg

max 4145 x 1100 x 1960 mm

max 18.5 m
with stinger

max 11.2 m
with JIB800G

Whether it is a small job or a big construction site, the SPX536 is the mini crane par excellence:
Reliable and safe, it adapts to any kind of job.



Technical Information

Dimension	 L x W x H	4145 x 1100 x 1960 mm
Stab Area		4160 x 4160 mm

Crane & Options Weights		Kg
	 SPX536CDH	3600
	 /	
	 4T-D8	60
	 AUX PP400-4D PP220-4D	40
	 JIB800G JIB900.2H MR800.4 JIB301GR JIB302GR	26 210 295 200 210

SPX536CDH	Diesel Engine	KUBOTA D1105-E3B	18.5 kW 25 Hp
-----------	---------------	------------------	------------------

Speed		2 km/h
-------	---	--------

Gradeability		25°
--------------	---	-----



Boom Length
3.4 - 12.1 m 40 sec.

Working Angle
-2° / 80° 35 sec.

Electric Power Pack

 AUX	4 kW - 3F 400 VAC 50 Hz 4 kW - 1F 110 VAC 60 Hz
---	--

Rotation
360° / 1.0 rpm


Max. Track Load
 0.53 kg/cm²

Max. Outrigger Load
 2700 kg



Winch&Fall Stages

 Main Winch	900 kg 60 m - Ø 8 mm 40,6 m/min.
--	--

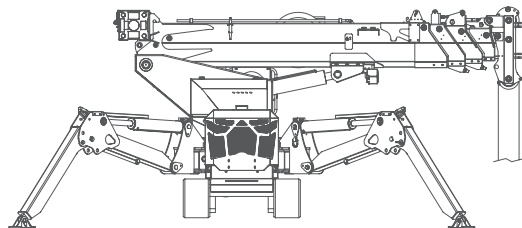


Max. Capacity	Line	Metres
 3600 kg	3	-18 m
 1800 kg	2	-26 m
 800 kg	1	-53 m




Load Chart

000 Capacity with jib
000 Pick&Carry

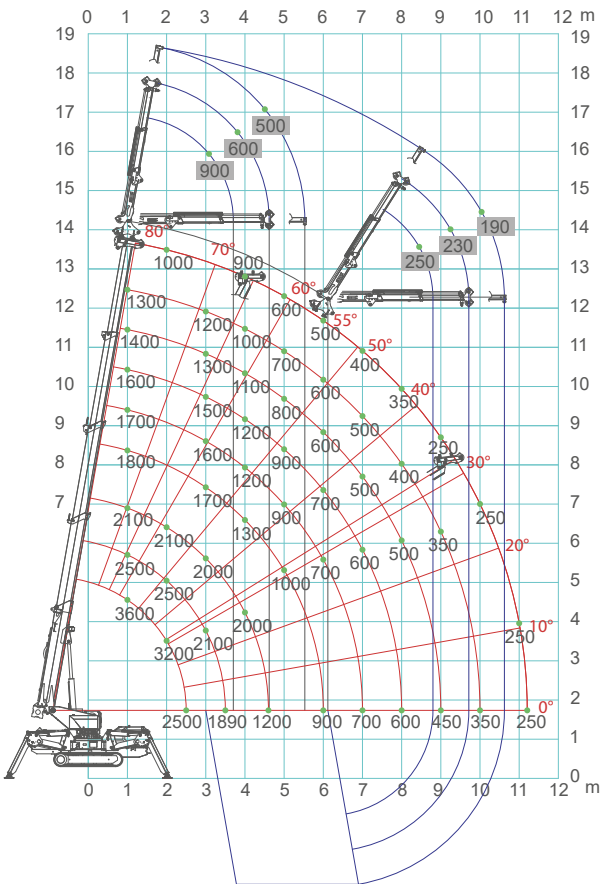

Dimensions

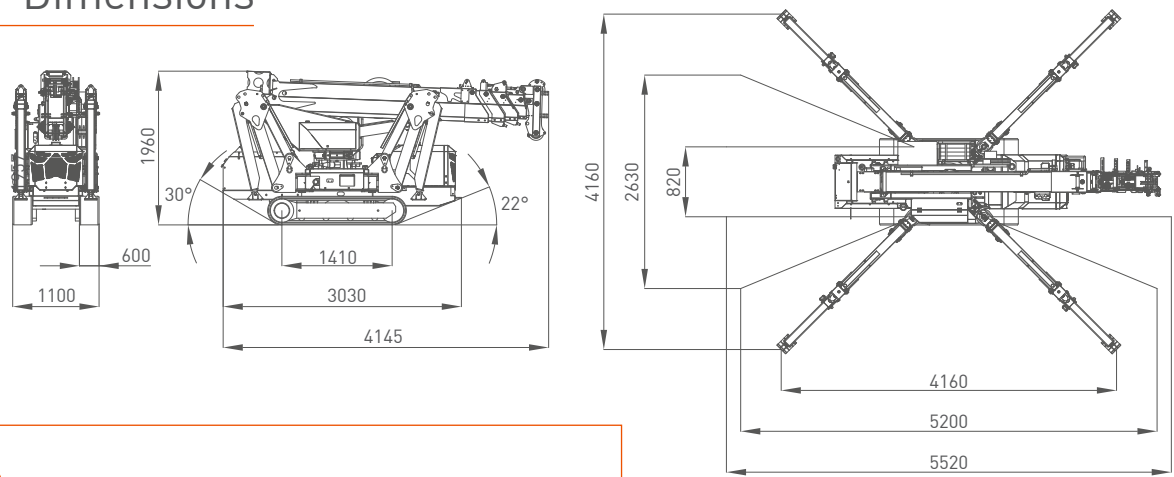


Crane Options


Kit Motore Elettrico



J-Connect

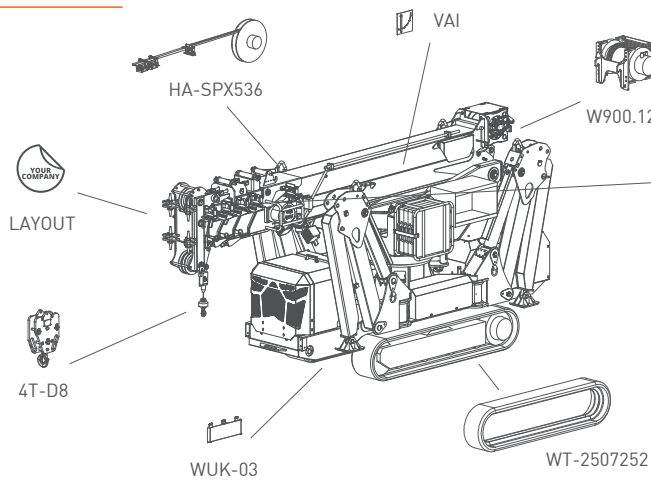

Accessori

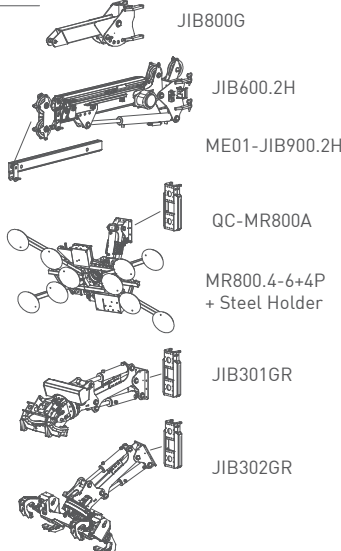

A2B BPI CCI DTC EXT GSC LMI P&C PPA SCI TH VW RCD 2SW 2ST



Tools Configurations

JIB800G	JIB900.2H*	MR800.4-6+4P	JIB301GR	JIB302GR
 800 kg	 600 kg	 800 kg	 300 kg	 300 kg
 800 kg @ 13.7m	 500 kg @ 18.5 m	 400 kg @ 14.2 m	 300 kg @ 15.2 m	 300 kg @ 15.2 m
 250 kg @ 11.2 m	 190 kg @ 10.5 m	 150 kg @ 9 m	 300 kg @ 8 m	 300 kg @ 8 m

* Manual extension (stinger) available