

SPK60

 6000 kg

 3505 x 2320 x 2640 mm

 27 m

 18 m

The only mini crawler crane on the market with an operator's cab and luffing capability thanks to its hydraulic articulated jib – fully featured, advanced technology and more than 50 configurations.




Technical Information

Dimension	 3505 x 2320 x 2640 mm
Track Ext.	 3505 x 2920 mm

Crane & Options Weights		Kg
	 SPK60	12200
	 /	1560
	 8T-D10	110
	 PP400-11D.V02 PP600-11D.V03	140
	 JIB1501.3HL	680
	 JIB1501.FL	265
	 JIB3500GX	70
	 JIB300GR	245

SPK60	Diesel Engine	YANMAR 4TNV98CT	53.7 kW 73.0 Hp
-------	---------------	-----------------	--------------------

Speed	 1.7/3.1 km/h
Gradeability	 10°

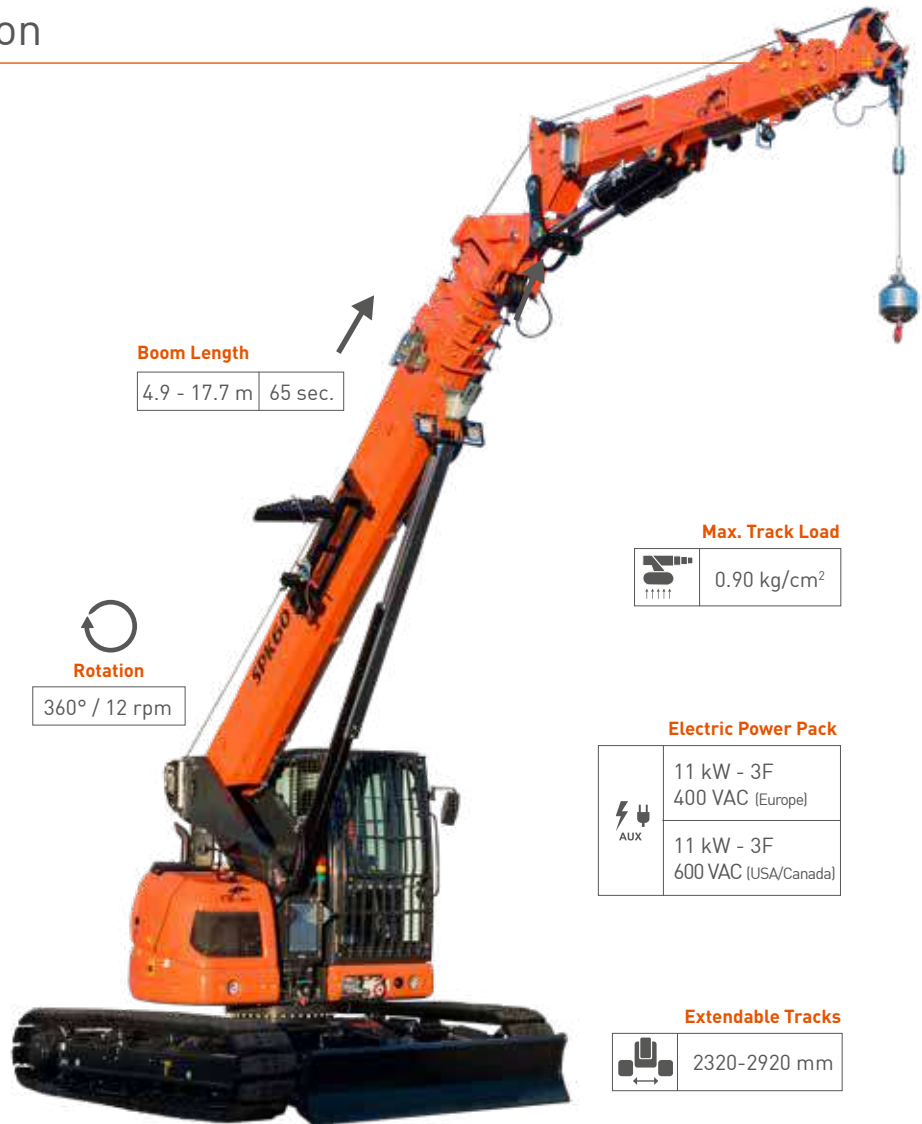

Boom Length
4.9 - 17.7 m 65 sec.

Rotation
360° / 12 rpm


Max. Track Load
0.90 kg/cm²

Electric Power Pack
11 kW - 3F
400 VAC (Europe)
11 kW - 3F
600 VAC (USA/Canada)


Extendable Tracks
2320-2920 mm

Winch&Fall Stages


Main Winch
1500 kg
125 m - Ø 10 mm
30-55 m/min.

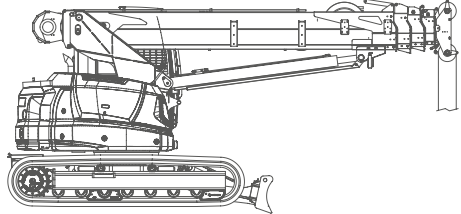

Max. Capacity	Line	Metres
 6000 kg	6	-20 m
 6000 kg	5	-23 m
 6000 kg	4	-28 m
 4500 kg	3	-38 m
 3000 kg	2	-58 m
 1500 kg	1	-116 m

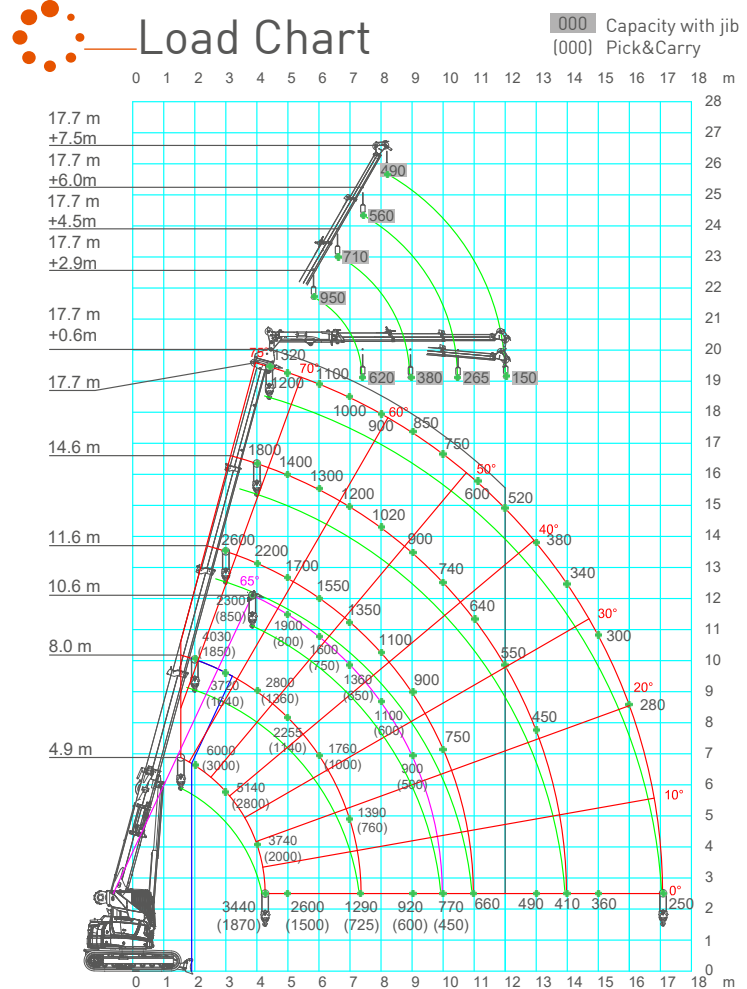

Dimensions


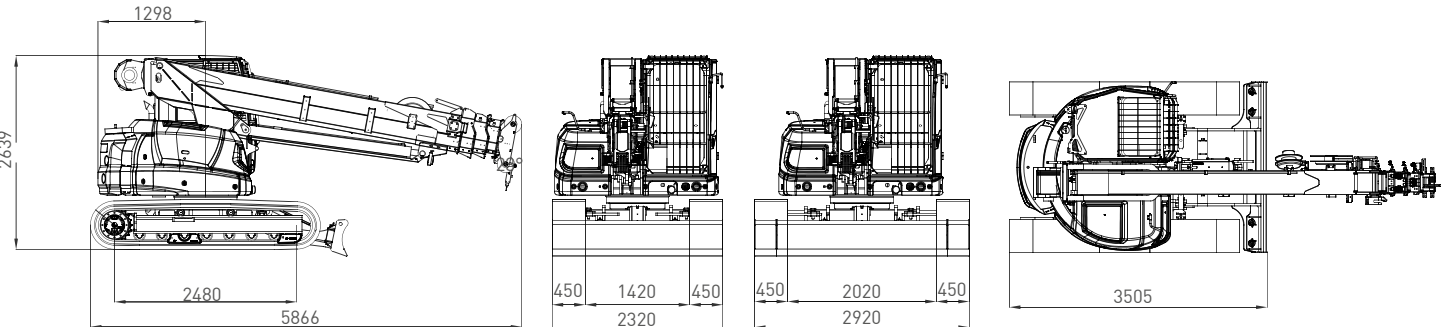


Crane Options

Electric Power Pack



J-Connect
J-CON
J-CON-Y2

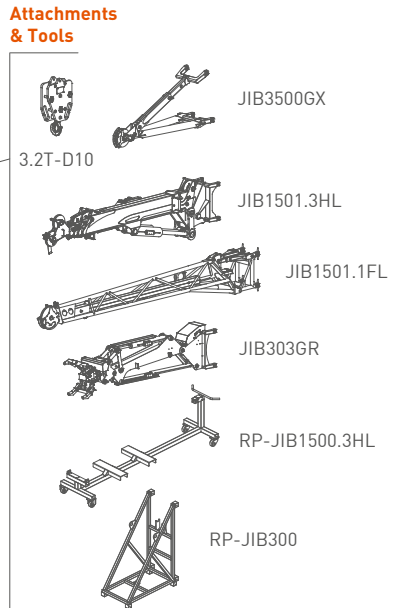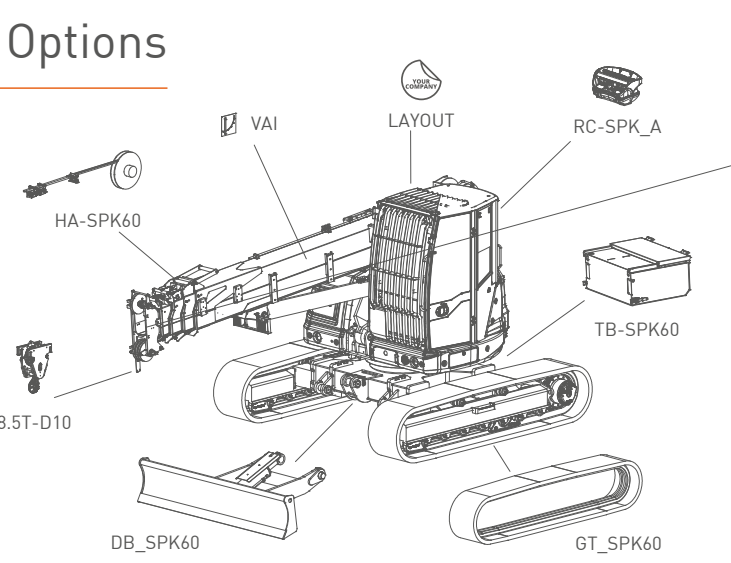

- A2B BPI CCI DTC EXT GSC LMI P&C PPA SCI TH VW RCD 2SW 2ST

Tools Configurations

JIB3500GX	JIB1501.3HL	JIB1501.1FL	JIB303GR
 3500 kg	 1500 kg	 1500 kg	 300 kg
 1330 kg @ 20.5 m	 490 kg @ 26 m	 700 kg @ 26 m	 300 kg @ 16 m
 150 kg @ 18.5 m	 150 kg @ 12 m	 200 kg @ 14 m	 300 kg @ 11 m