JF545.2

LITHIUM BATTERY

Lifting capacity
15500 kg

Max tip height
32,5 m

Dimensions (l x w x h)
5830 x 1840 x 2830 mm

Powered by
Lithium battery

Weight
13830 + 3500 kg



J-Link
Works With Trackunit

EN [m - kg]

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

FEATURES



3 BOOM ARTICULATIONS

- Higher boom versatility
- Pass-over obstacles
- Negative angle operation

SELF REMOVABLE COUNTERWEIGHT

- 3,5 tons
- Easy crane transport
- Work without counterweight: zero tail radius



VERSATILE STABILITY CONFIGURATIONS

- Stepless outriggers rotation 0°/45°
- Stepless telescopic outriggers extension
- Adjustable outriggers height
- Asymmetric configuration



ENDLESS CRANE CONFIGURATIONS

Hook - 15500 kg capacity


Winch

- Two options: 3000kg-60 m / 2000kg-60 m
- 1 / 2 / 3 falls

Hydraulic jib - 3000 kg capacity

- Hook or winch mode
- 12,5 m length fully extended
- Electro-hydraulic lines for tools

Independent hydraulic tools - Easy connection for any tool





INTUITIVE USER INTERFACE

Radio control

- Optimized usability
- Improved layout


Touch display: 7" IP66 heavy duty

- Live stability area
- Crane assistant onboard
- Self-diagnostics & troubleshooting



MAN BASKET

- Up to 30,3 m height
- Single or two people
- Self-levelling, rotation and height adjustment
- Aluminium, steel or fiberglass
- EN280 certified

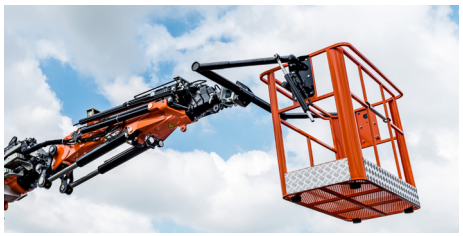

J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units




*Optional




LITHIUM BATTERY POWERED

- Indoor operation, emission free
- Maintenance free
- Runtime over 1 workday
- Single, three phase & CCS recharge (0-90% in 2h CCS)
- Integrated BMS - Battery Monitoring System
- WORK WHILE CHARGING


EASY TRANSPORT

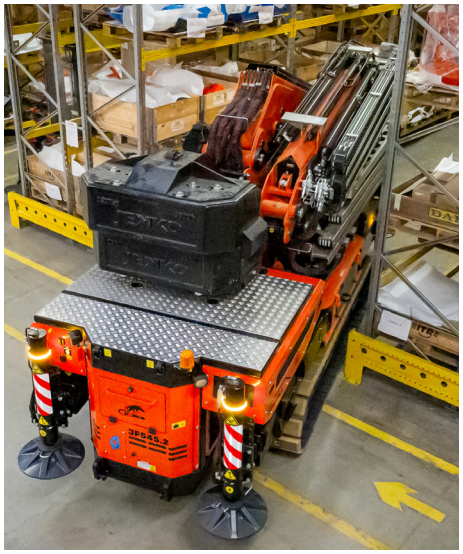


DIMENSIONS (mm)

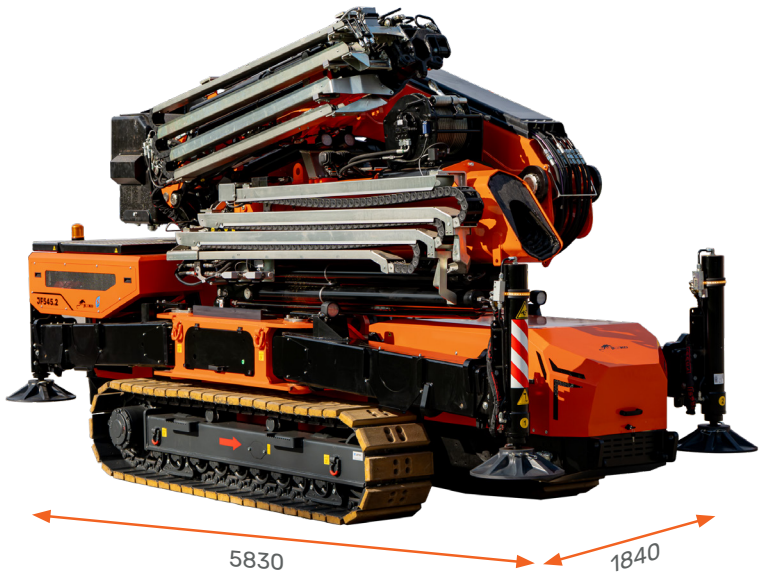

STABILITY AREA (mm)

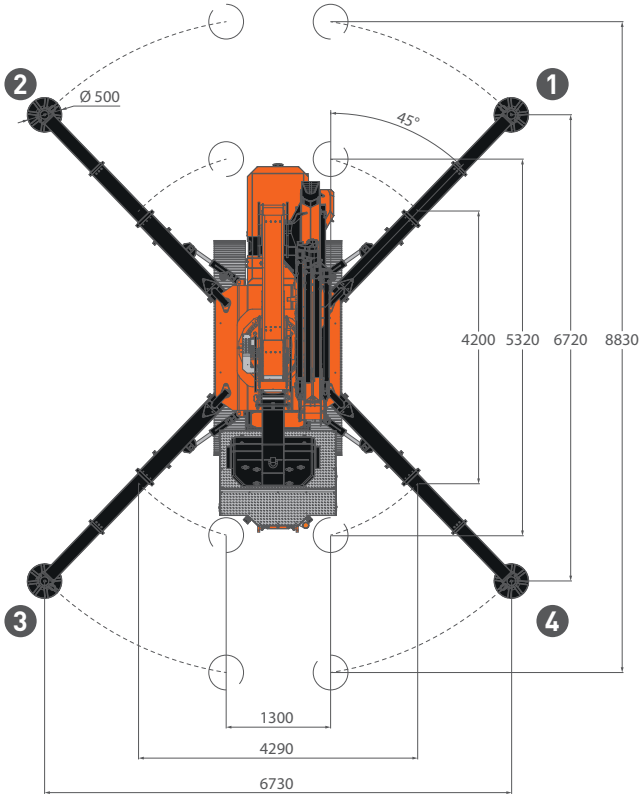


COMPACT FOOTPRINT

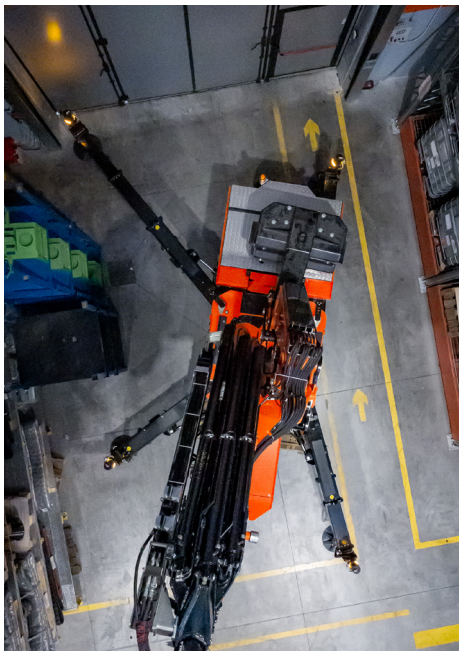


LOAD CHARTS

Main Boom

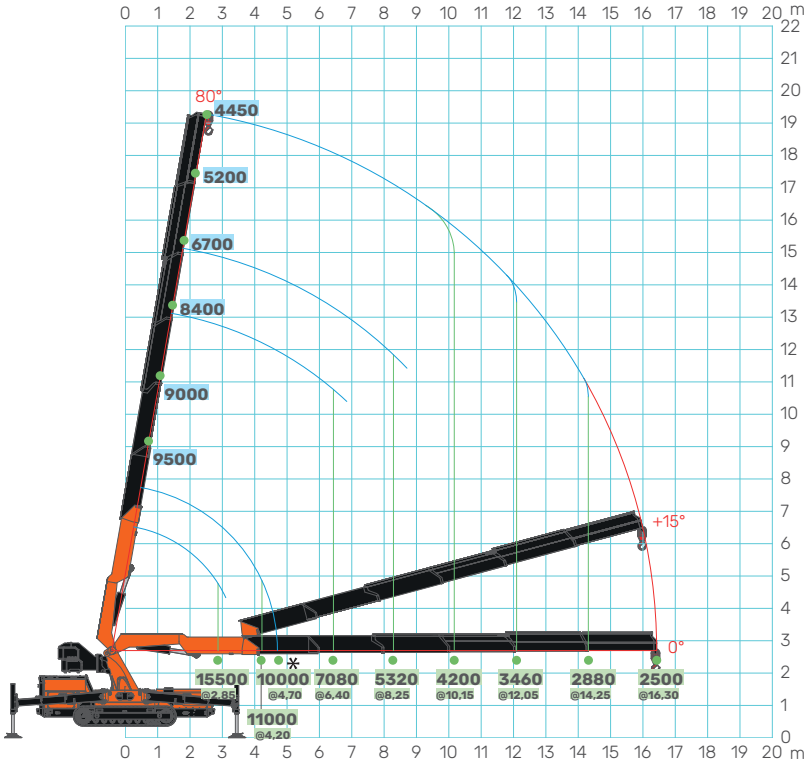

Hydraulic Jib

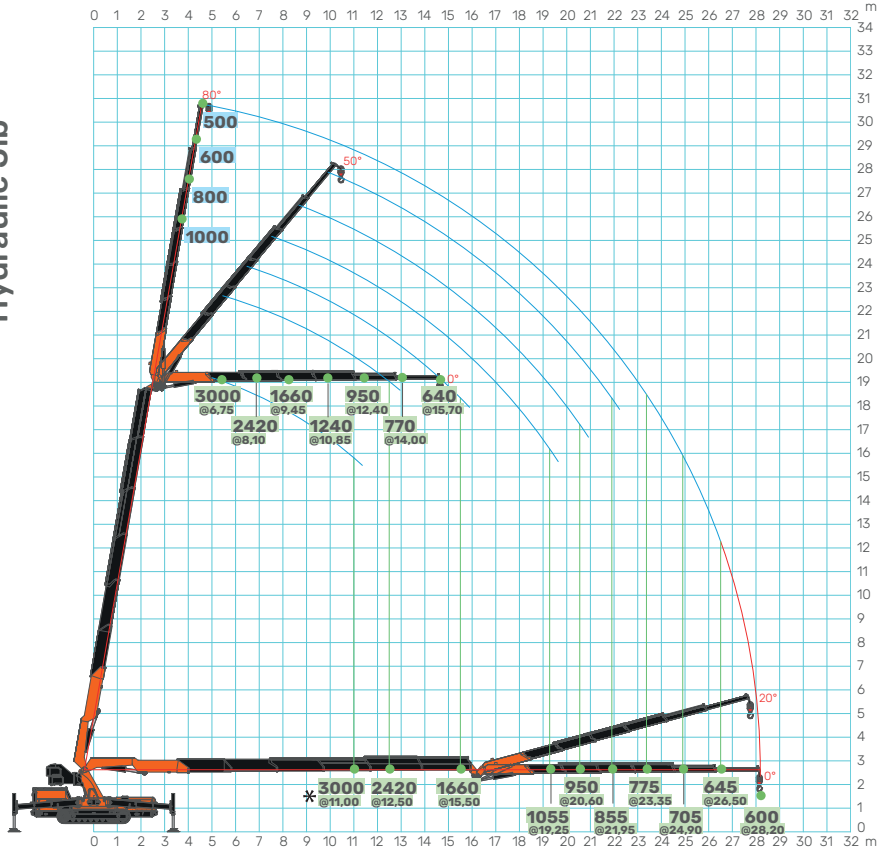

TOOLS AVAILABLE

HYDRAULIC JIB
WLL 3000 kg




MAN BASKET
1 or 2 people



GLASS MANIPULATOR
WLL 800 kg - JVM800R



SEARCHER HOOK
WLL 15500 kg

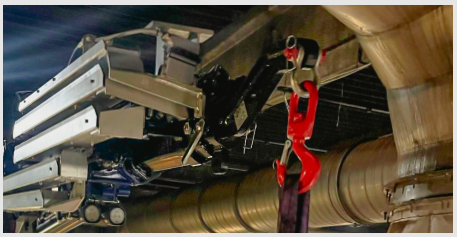

MECHANICAL EXTENSIONS



Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

Specifications are subject to change without notice.
All data provided is for reference purposes only and is not legally binding.