

JF235

LI-ION BATTERY



Lifting capacity

6150 kg



Max tip height

25,0 m



L x W x H

Dimensions (l x w x h)

5010 x 1600 x 2480 mm



Powered by

Li-ion battery



Weight

9780 kg



EN [m - kg]



FEATURES



3 BOOM ARTICULATIONS

- Higher boom versatility
- Pass-over obstacles
- Negative angle operation

VERSATILE STABILITY CONFIGURATIONS

- Stepless outriggers rotation 0°/45°
- Stepless telescopic outriggers extension
- Adjustable outriggers height
- Asymmetric configuration
- Self-levelling



ENDLESS CRANE CONFIGURATIONS

- Hook** - 6150 kg capacity
- Winch**
 - 1500 kg capacity single fall / 3000 kg 2 falls
 - 40 m rope
- Hydraulic jib** - 2075 kg capacity
 - Hook or winch mode
 - 11,0 m length fully extended
 - Hydraulic lines for tools
- Independent hydraulic tools** - Easy connection for any tool



INTUITIVE USER INTERFACE

- Radio control**
 - Optimized usability
 - Improved layout
- Touch display:** 7" IP66 heavy duty
 - Live stability area
 - Crane assistant onboard
 - Self-diagnostics & troubleshooting



VARIABLE SPEED MOTOR MANAGEMENT

- Accurate crane movements
- Low consumption
- Low noise



MAN BASKET

- Up to 25,3 m height
- Single or two people
- Self-levelling, rotation and height adjustment
- Aluminium, steel or fiberglass
- EN280 certified



J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units




*Optional



LI-ION BATTERY POWERED


- Indoor operation, emission free
- Maintenance free
- Runtime over 1 workday
- Integrated BMS - Battery Monitoring System
- On board single & three phase battery charger: 0-80% in 4h 30' (400V)
- Adjustable charging current
- Work while charging

EASY TRANSPORT

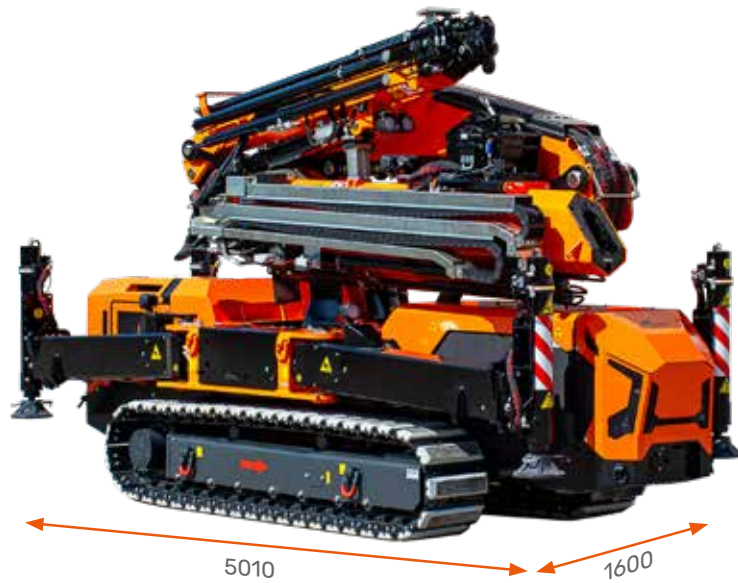

DIMENSIONS (mm)



STABILITY AREA (mm)

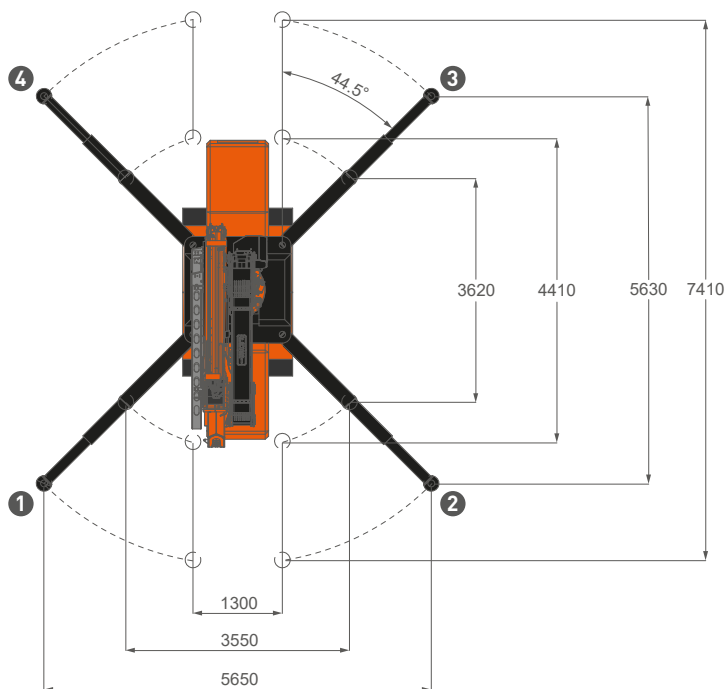

COMPACT FOOTPRINT



LOAD CHARTS

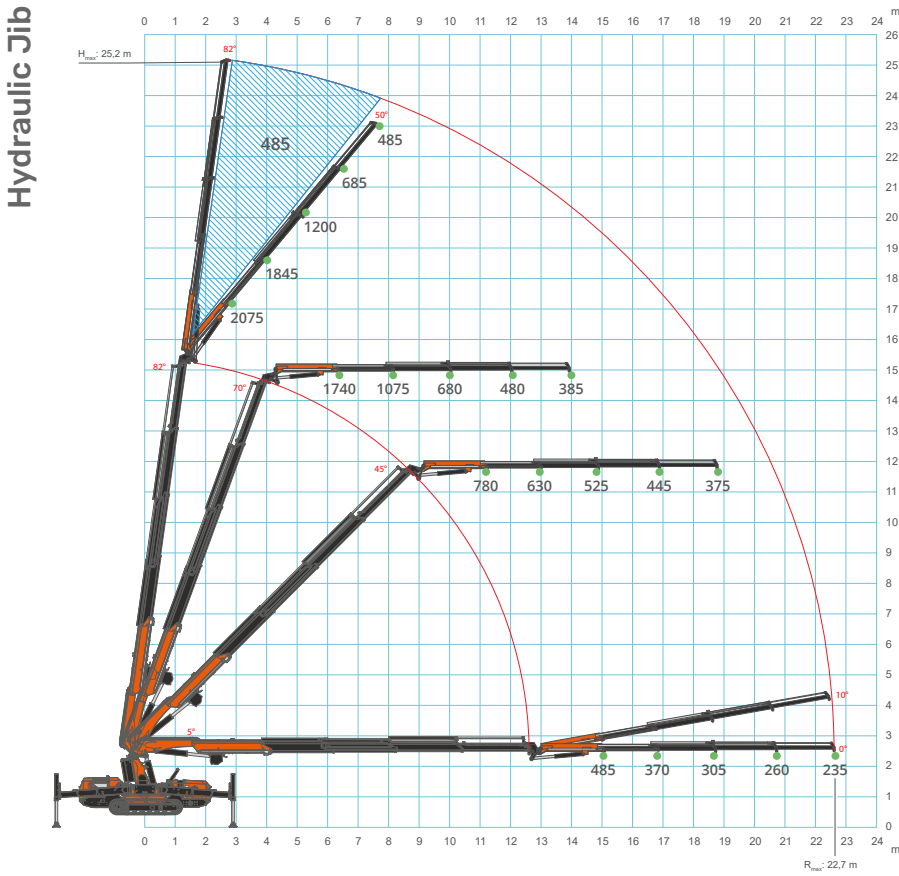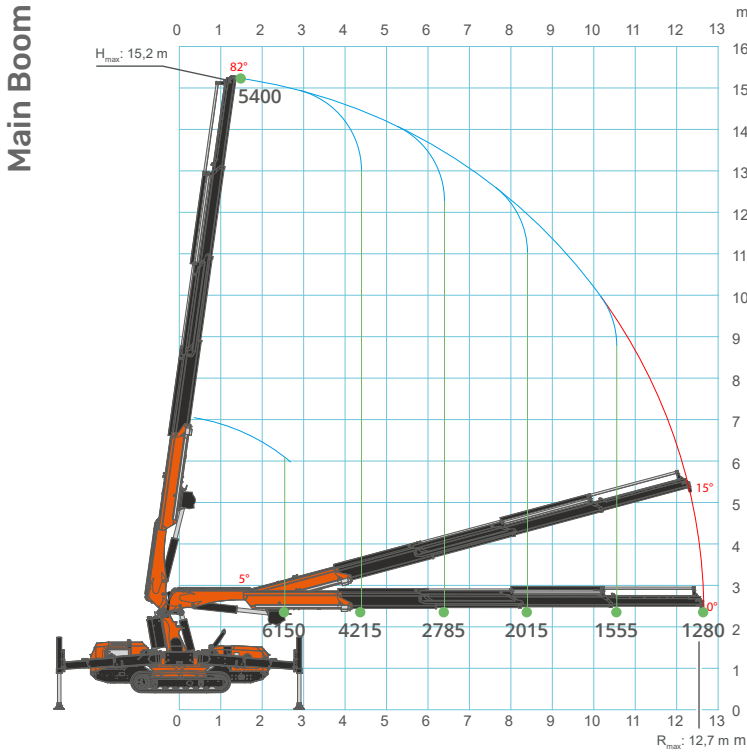

TOOLS AVAILABLE

HYDRAULIC JIB
2075 kg SWL



MAN BASKET
1 or 2 people



GLASS MANIPULATOR
800 kg SWL - JVM800R



SEARCHER HOOK
5500 kg SWL



MECHANICAL EXTENSIONS



JF235
LI-ION BATTERY

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.