

JIB500GR

BEAM & PIPE MANIPULATOR



Lifting capacity

500 kg



Dimensions (l x w x h)

1260 x 620 x 1650 mm



Activation

Hydraulic



Weight

230 kg





EN [m - kg]

**TOOL COMPATIBLE WITH JEKKO MINI CRANES
SPX532, SPX650 AND SPX1280**

DIMENSIONS_(mm)

MOVEMENTS

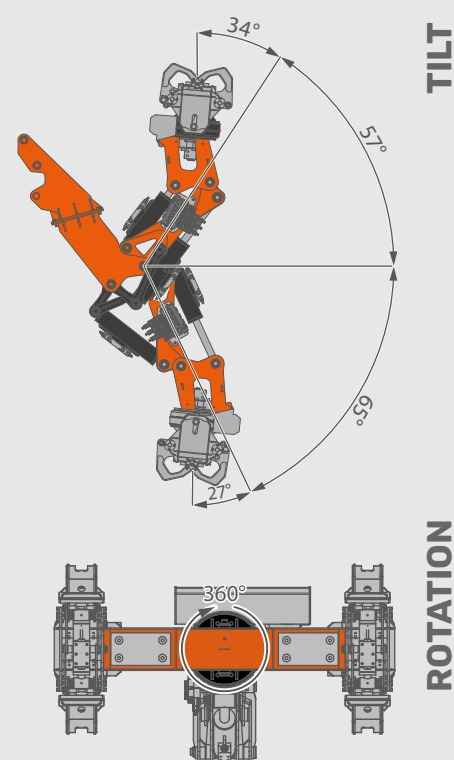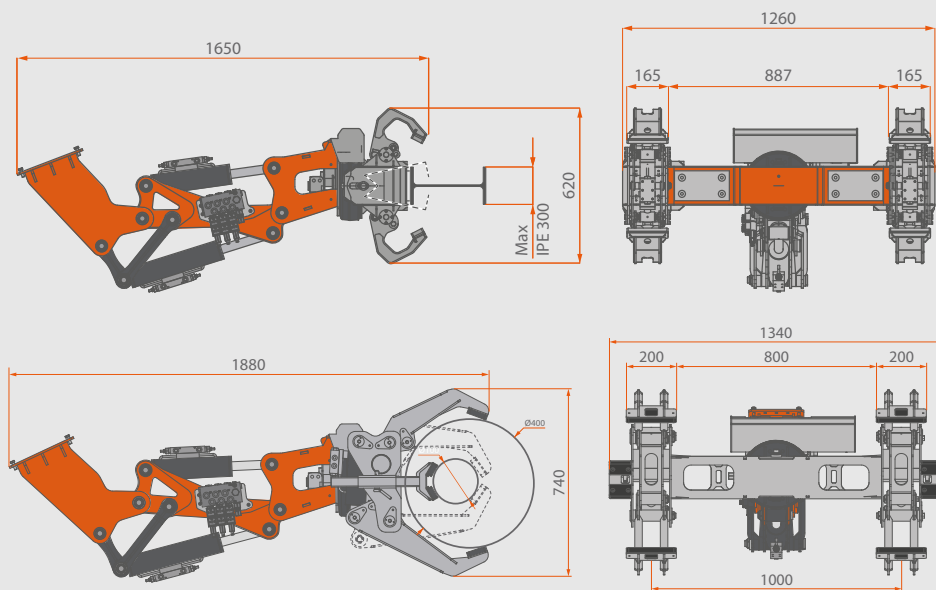

500KG LIFTING CAPACITY

DEDICATED BEAMS & PIPES CLAMPS

- Beam clamp: for IPE, HEA, HEB and similar
- Pipe clamp: for 100-400 mm diameter
- Quick clamp installation



WIDE MOVEMENTS RANGE

- 360° continuous rotation
- Wide tilt with double articulation:
 - 57° / +65° tilt A
 - 34° / +27° tilt B



PLUG & PLAY

- Completely hydraulic
- Fully integrated with the crane
- Controlled by crane radio control



TRANSPORT TRAY

- Practical and sturdy
- Easy to install



*Optional



JIB500GR
BEAM & PIPE MANIPULATOR

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com
Specifications are subject to change without notice.
All data provided is for reference purposes only and is not legally binding.

V25.06