

SPB209

 990 kg

 2500 x 770 x 1600 mm

 7.9 m

 6.5 m

The smallest in the range but it still does it all: compact, cheap, simple and safe.




Technical Information

Dimension		2500 x 770 x 1600 mm
Stab. Area		3000 x 3000 mm

Crane & Options Weights		Kg
	SPB209	1450
	/	
	2T-D7	20
	PP400-4DX PP220-4DX PP220-2DX	45
	JIB800GB	25

SPB209	Petrol Engine	YAMAHA MZ 360	7.6 kW 10.4 Hp
--------	---------------	------------------	-------------------

Speed		1.7 km/h
Gradeability		20°
Ext. Tracks		770-1065 mm

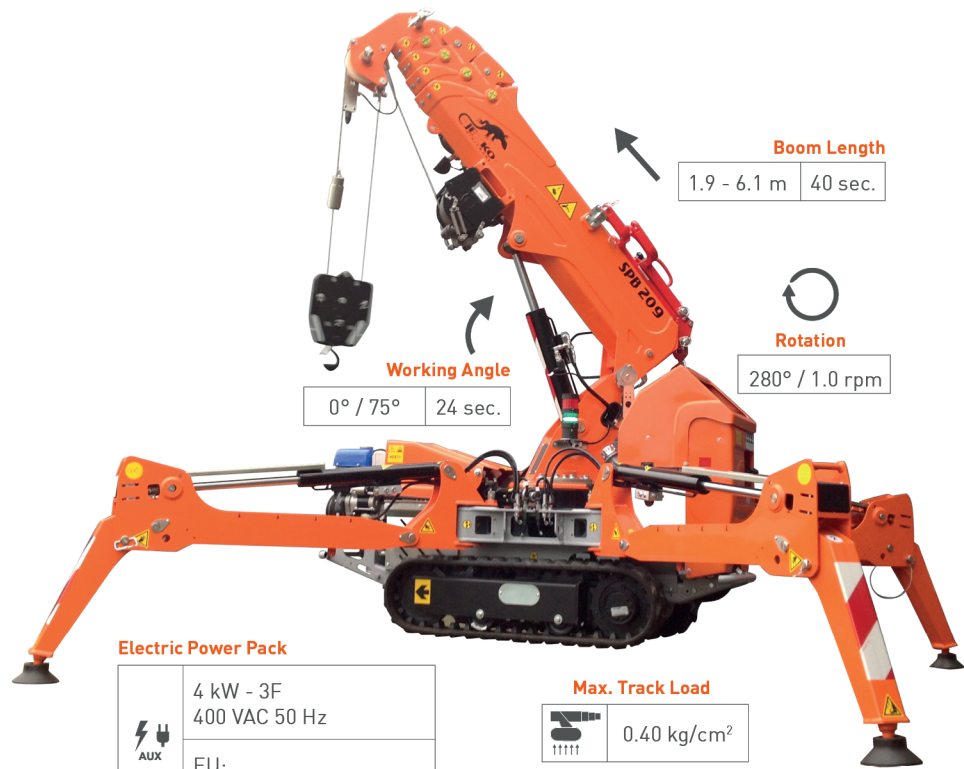

Electric Power Pack

	4 kW - 3F 400 VAC 50 Hz
	EU: 2 kW - 1F 220 VAC 50 Hz USA/CANADA: 4 kW - 1F 110 VAC 60 Hz

Max. Track Load

	0.40 kg/cm ²
---	-------------------------


Max. Outrigger Load

	1050 kg
---	---------



Winch & Fall Stages


	Main Winch
	400 kg (Single line) 53 m - Ø 6 mm 15.1-31.8 m/min.

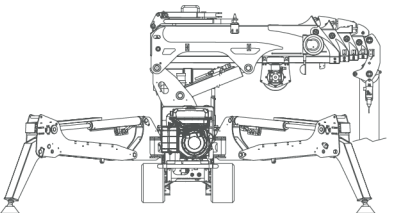


Max. Capacity	Line	Metres
 990 kg	2	-22 m
 495 kg	1	-46 m




Load Chart

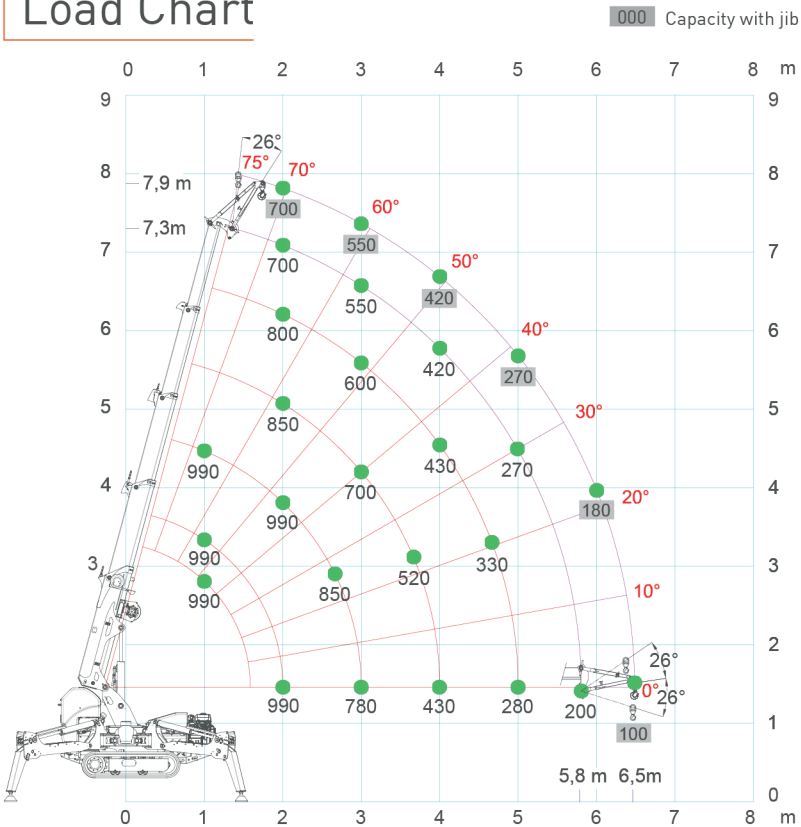

Dimensions

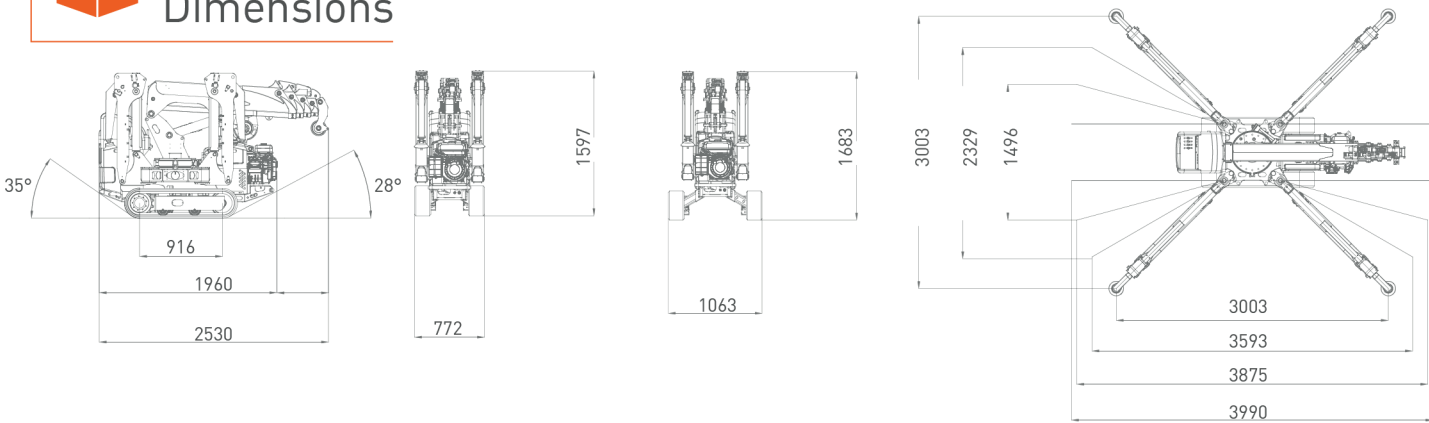

Crane Options

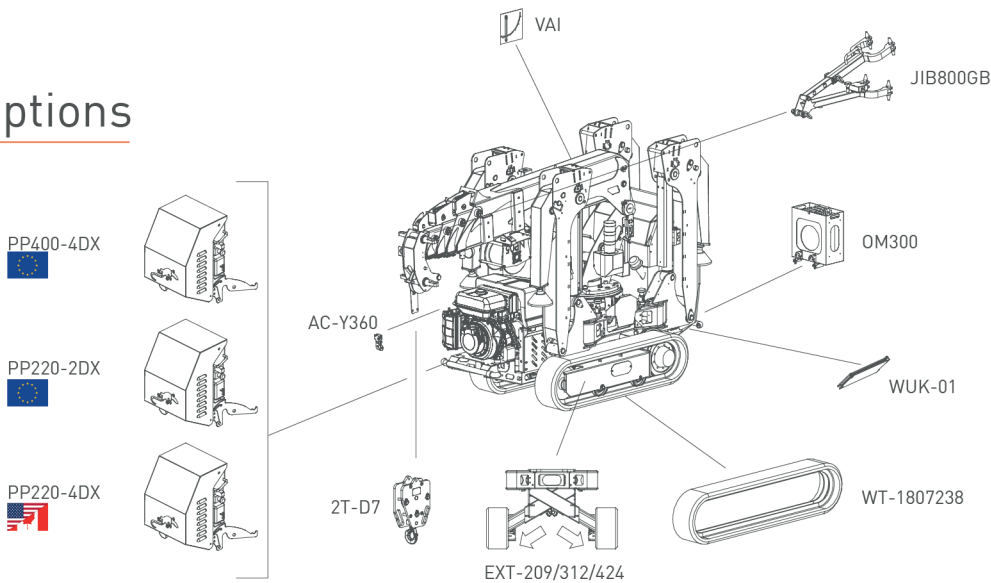

A2B BPI CCI DTC EXT GSC LMI P&C PPA SCI TH VW RCD 2SW 2ST



Tools Configurations

JIB800GB	
	800 kg
	700 kg @ 7.9 m
	100 kg @ 6.5 m